


Datasheet

Stilux-B audio indoor station for hands-free talking and fire announcement function

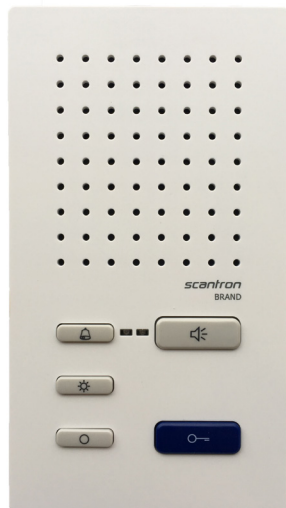

Communication possibilities	
Voice transmission	Duplex hands-free talking (simplex communication can be activated)
Audio privacy function	Yes
Automatic call cut-off	Yes
Number of selectable ring tones	13
Speaking time	Max. 2 min
Fire announcement	
Emergency announcement function installed	Yes
Possibility for two way emergency communication	Yes (depending on the system setup)
Maximum volume alarm tone at 1 meter	91 dBa
Maximum volume emergency announcement at 1 meter	80 dBa
Ignores ring tone mute settings at emergency announcement	Yes
Number of announcement groups per call destination	3
Functions and adjustable parameters	
Functions through keys	Light switch, accept conversation, door release, ring tone mute, control function, ring tone and conversation volume, ring tone selection.
Parameters adjustable with Service Device	Light switch function, parallel call.
Parameters adjustable with Configo™	Simplex communication, parallel call, ring tone selection, change AS-address, reset to factory settings function, announcement groups.
Initial setup (connect doorstation button with indoor station)	With Service device or Manually
Housing	
Size	180 x 100 x 25 mm
Recommended mounting height of display	160 cm
Mounting	Surface-mount
Material and color	Plastic, white
Weight	200 g
Dock station available	Yes
Technical data	
Signal transmission and power supply	Polarity-free and short-circuit protected 2-wire BUS
Wiring technique (number of wires)	3 (a, b, P)
Power supply	24 V DC
Input current I(a)	I(a) = 0.2 mA
Input current I(P), standby	I(P) = 0,8 mA
Input current I(Pmax), max.	I(Pmax) = 75 mA
Mixed installation with audio and video in a system	Possible
Compatible with access control and Nova Software	Yes
Acceptable ambient temperature	-5 to + 40 °C
UV resistance	Unlimited